


TITAN 900



-  **Commercial Waste**
Ø 25 – 50 t/h
-  **Rubber and Waste Tires**
Ø 13 – 25 t/h
-  **CFRP/GFRP Waste**
Ø 15 – 30 t/h
-  **Waste Wood**
Ø 50 – 100 t/h
-  **Wooden Railway Sleepers**
Ø 25 – 50 t/h
-  **Aluminium**
Ø 15 – 30 t/h

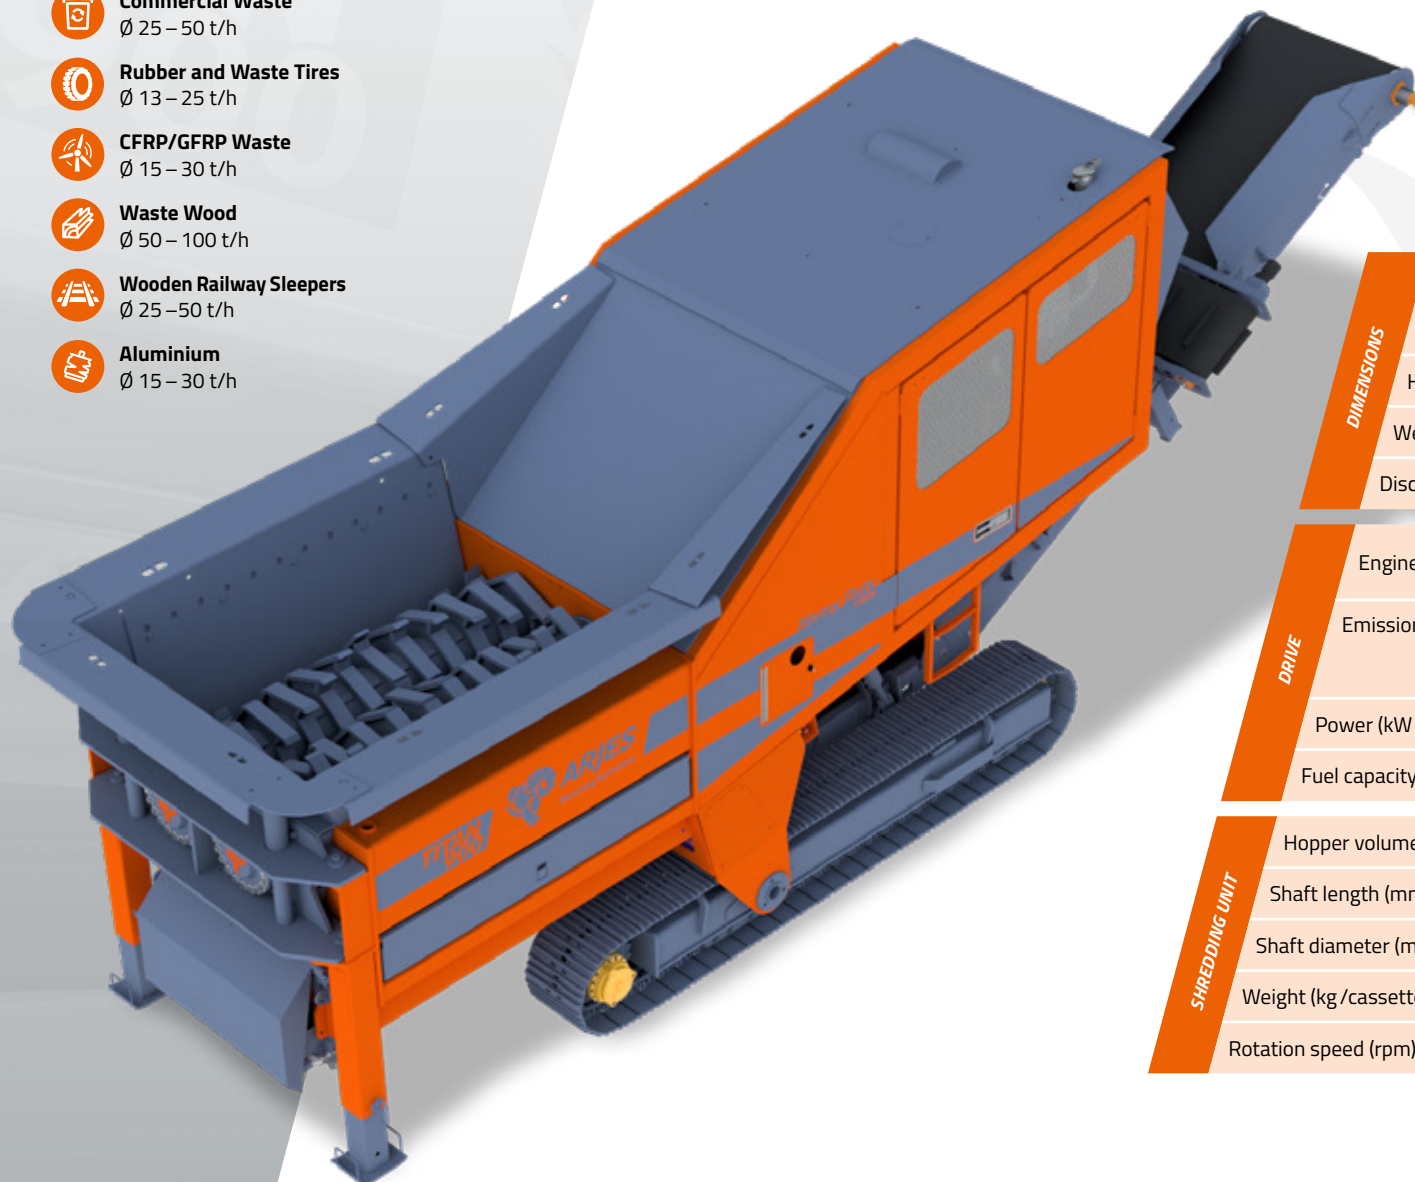

Technical Data

DIMENSIONS	Length (mm)	11,000 / 11,000 (transport)
	Width (mm)	3,000 / 3,000 (transport)
	Height (mm)	4,200 / 3,700 (transport)
	Weight (kg)	35,000
	Discharge height (mm)	3,500
DRIVE	Engine type	Diesel - TAD 1385 VE (EU/US) Diesel - TAD 1650 VE-B (ROW)**
	Emission standard	Stage V (EU) / EPA Tier IV (US) Stage III A (ROW)**
	Power (kW / HP)	405 / 550
	Fuel capacity (l)	800
SHREDDING UNIT	Hopper volume (m³)	5
	Shaft length (mm)	2,500
	Shaft diameter (mm)	860
	Weight (kg / cassette)	7,650
	Rotation speed (rpm)	45

*Recommended retail price FCA plus applicable VAT and additional costs (transport, insurance, customs, etc.) as well as optional attachments

**Rest of the world (country-specific requirements) / Subject to technical changes and misprints. Status: January 2025

www.arjes.de